EL-310E

SHARP SERVICE MANUAL

CODE : 00ZEL310ESM/E

REPLACEMENT MODEL

EL-310E

** MODEL EL-310EC**

STANDARD FUNCTION	8	digits	1	M

DISPLAY SECTION

12'345'678.

ELEMENT :	TN-LCD	PARTS NAME :	NO5721
NUMERAL :	8 digits	SYMBOL (Dot) :	1 digit(s)





KEY LAYOUT

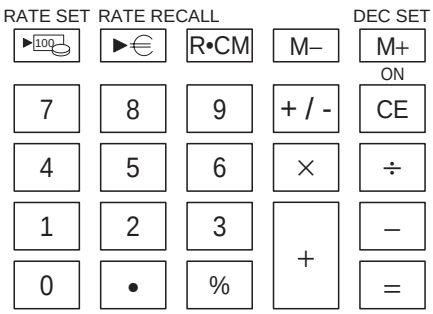

KEY SYSTEM : Resin Key + rubber

LSI

Name :	Li375601C
Type :	CHIP
Pin :	48 pins

POWER SUPPLY	AC : ×	DC : ○

- TWIN POWER (Solar cell & LR1130 x 1pcs)
- BRIGHTNESS MUST BE OVER : 300Lux
- OPERATION TIME (LR1130) : Approx.2500hours

AC ADAPTER		DIMENSION (mm)	87(W) x 116(D) x 20(H)
RECHARGEABLE BATTERY		CALCULATIONS	
POWER CONSUMPTION		Four arithmetic calculations, Constant calculation, Power calculation, Chain calculation, Reciprocal calculation, % calculation, Add-on (discount) calculation.	
AUTO POWER OFF TIME	Approx. 7 minutes		
MEMORY PROTECT	Yes		

Parts list

No.	PARTS CODE	PRICE RANK	NEW MARK	PART RANK	DESCRIPTION
1	XUPSN20P06000	AA		C	Screw (for cabinet)
2	TINSZ0379THZZ	AG	N	D	Manual (E / G / F / i / S / SW / N) [LC7, LE7]

Packing form

Form	SPEC	Country
Blister	LC7	SEEG, SEES, SEIS, SES/SEZ, SEA/SEB, SEF
Universal	LC7	SEEG, SEES, SEIS, SES/SEZ, SEA/SEB, SEF
Clamshell	LE7	SEF

COPYRIGHT © 1999 BY SHARP CORPORATION

All rights reserved.
Printed in Japan.
No part of this publication may be reproduced,
stored in a retrieval system, or transmitted.
In any form or by any means,
electronic, mechanical, photocopying, recording, or otherwise,
without prior written permission of the publisher.

SHARP CORPORATION
Information Systems Group
Quality & Reliability Control Center
Yamatokoriyama, Nara 639-1186, Japan

1999 August Printed in Japan (t) SB

This document has been published to be used
for after sales service only.
The contents are subject to change without notice.

SHARP CORPORATION